




Quick Start Guide



04BXL P1M




1 Package

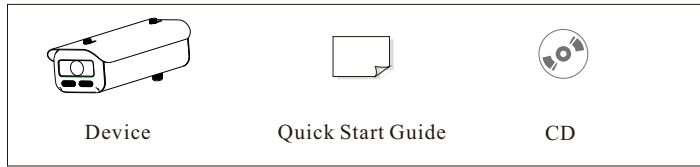

2 Overview

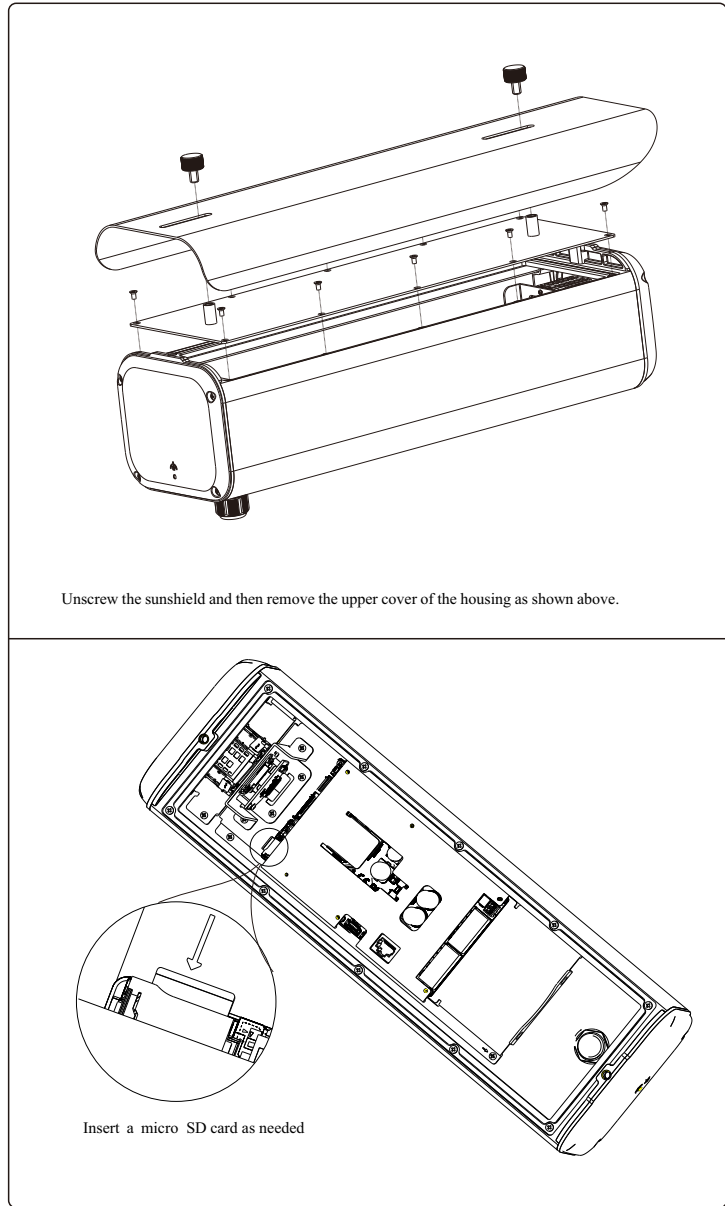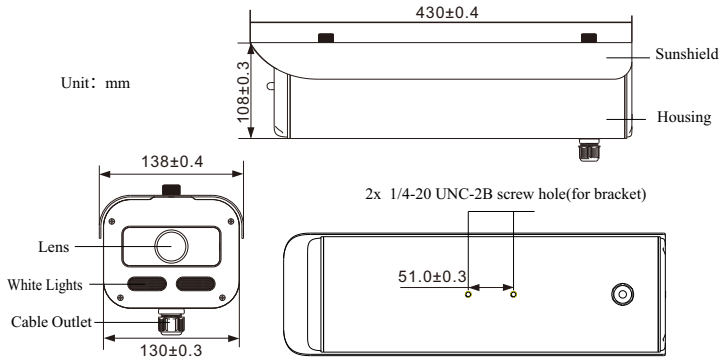


3 Cable Connection

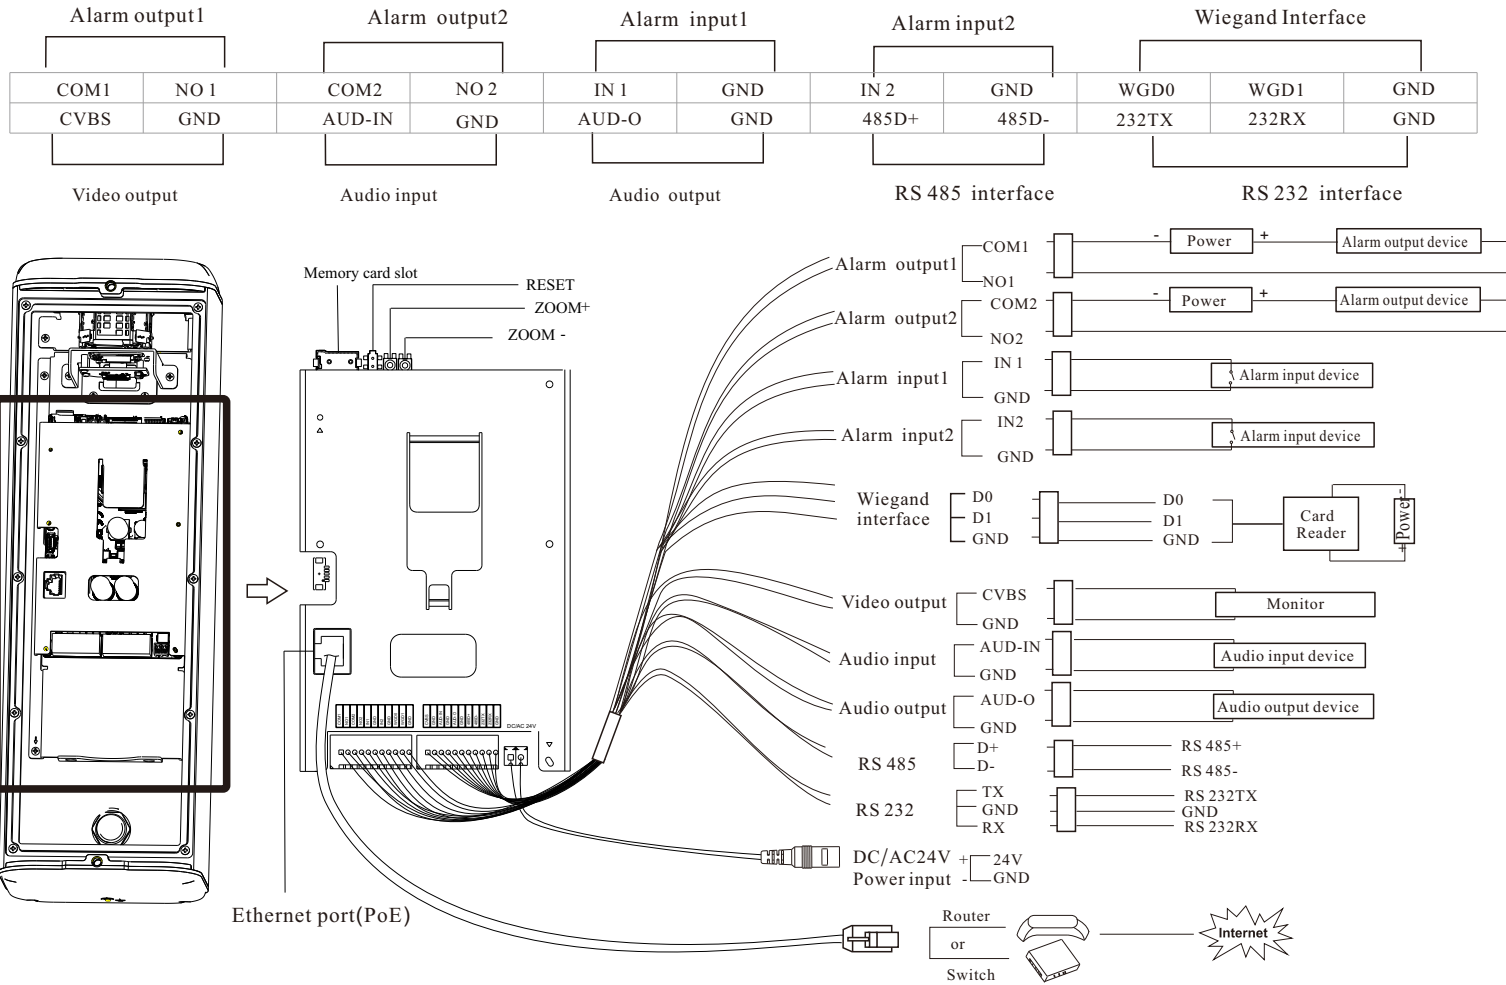

4 Installation

Wall Mounting (* WMT3 is not included)

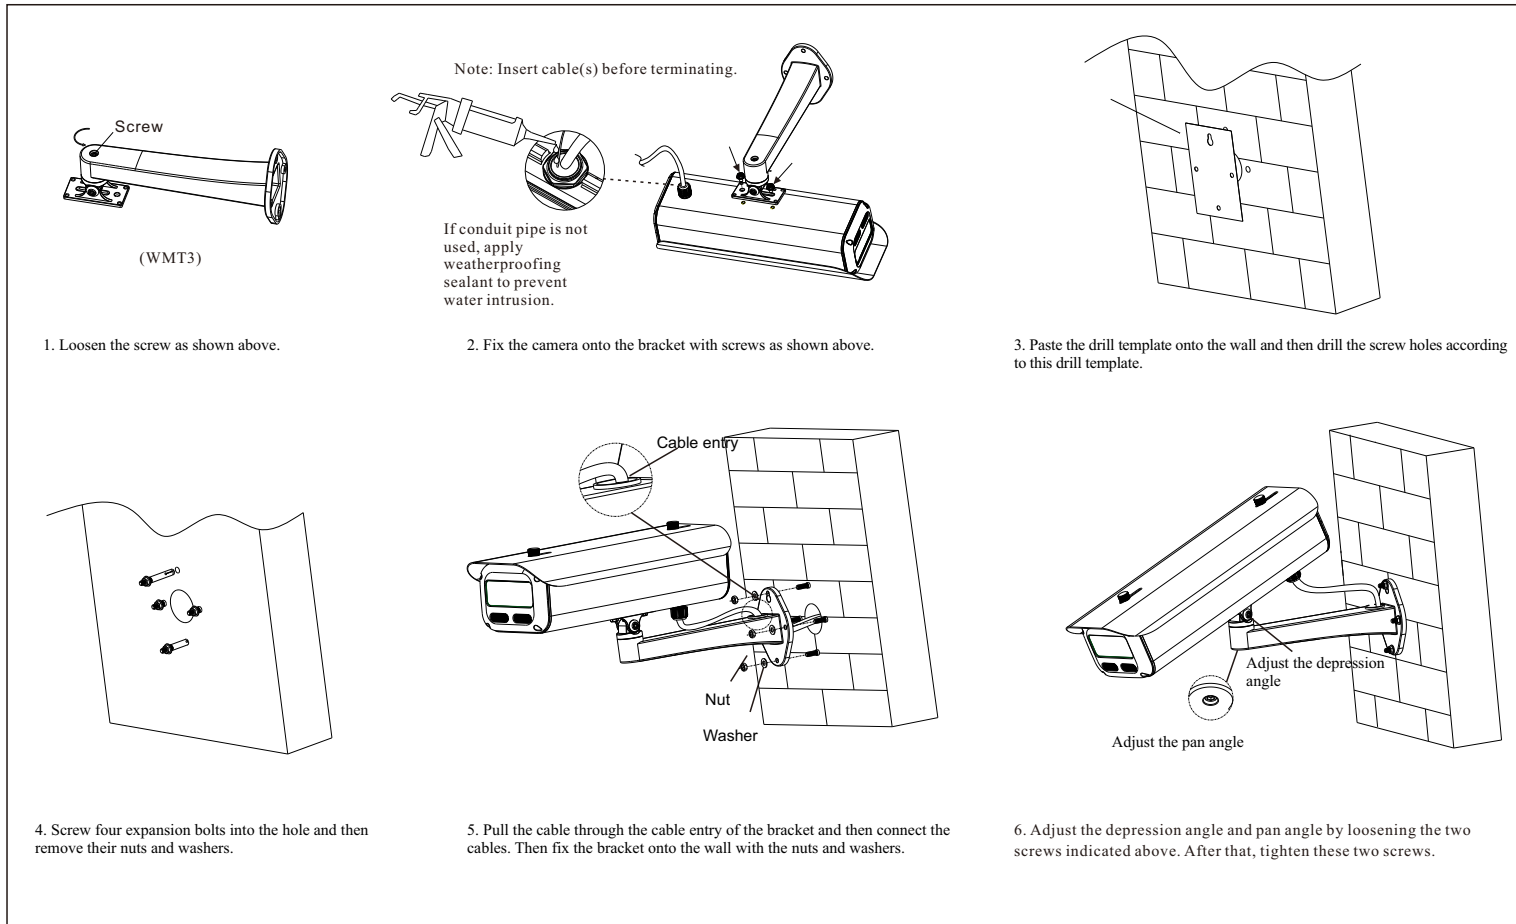

Welcome

Thank you for purchasing this network camera!
This owner's manual is designed to be a reference tool for your system.
Please read this manual carefully before operating the unit and retain it for future reference.
Should you require any technical assistance, contact Speco Technologies Tech Support at 1-800-645-5516

Important Safeguards and Warning

- Electrical safety
All installation and operation here should conform to local electrical safety codes.
Use a certified/listed 24V DC/AC power supply or adequate PoE switch.
Please note: The product must be grounded to reduce the risk of electric shock.
Improper handling and/or installation could run the risk of fire or electrical shock.
- Environment
Do not expose the unit to heavy stress, violent vibration or long-term exposure to water and humidity during transportation, storage, and/or installation.
Do not install near sources of heat.
Only install the product in environments inside the specification operating temperature and humidity range.
Do not install the camera near power lines, radar equipment or other electromagnetic radiation.
Do not block any ventilation openings if any.
Use all the weatherproofing hardware requirement to minimize weather intrusion.
- Operation and Daily Maintenance
Please shut down the device and then unplug the power cable before you begin any maintenance work.
Do not touch the CMOS sensor optic component. You can use a blower to clean the dust on the lens surface.
Always use the dry soft cloth to clean the device. If there is too much dust, use a cloth dampened with a small quantity of neutral detergent. Finally use the dry cloth to clean the device.
The grounding holes of the product are recommended to be grounded to further enhance the reliability of the camera.
The lens is an optical device, please don't touch or wipe cover surface directly during installation and use, please refer to the following methods if dirt is found:
Stained with dirt: Use oil-free soft brush or hair dryer to remove it gently.
Stained with grease or fingerprint: Use oil-free cotton cloth or paper soaked with alcohol or detergent to wipe from the lens center outward. Change the cloth and wipe several times if it is not clean enough.

Warning

This camera should be installed by qualified personnel only.
All the examination and repair work should be done by qualified personnel.
Any unauthorized changes or modifications could void the warranty.

Statement

This guide is for reference only.
Product, manuals and specifications may be modified without prior notice. Speco Technologies reserves the right to modify these without notice and without incurring any obligation. Speco Technologies is not liable for any loss caused by improper operation.


Note:

Before installation, check the package and make sure that all components are included.
Contact your rep or Speco customer service department immediately if something is broken or missing in the package.

4 Installation

Pole Mounting (* PMT3 is not included)


Note: Insert cable(s) before terminating.

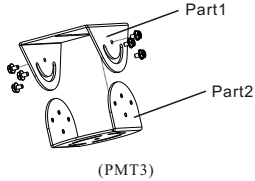

(PMT3)

1. Disassemble the bracket into two parts.


Note: Insert cable(s) before terminating.

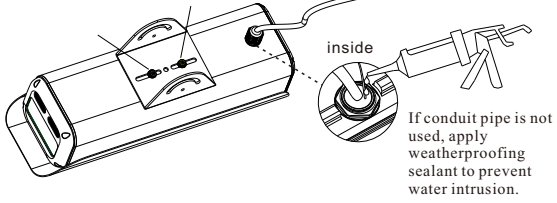


inside

If conduit pipe is not used, apply weatherproofing sealant to prevent water intrusion.


2. Fix the part1 to the camera with two screws.



3. Fix the part2 to the pole with four nuts.

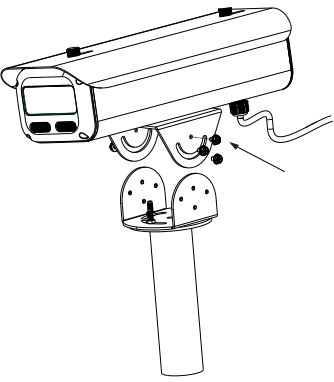


4. Fasten the part1 and part2 with screws.

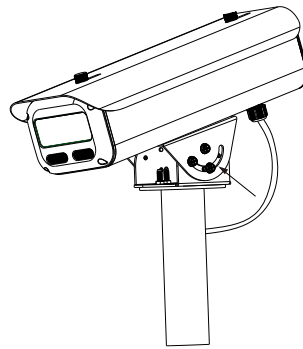


5. Connect the cables and then adjust the view angle of the camera by loosening the screws indicated above. After that, tighten these screws.

Note: Insert cable(s) before terminating.

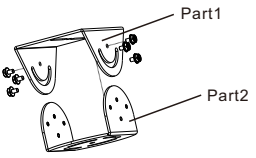

1. Disassemble the bracket into two parts.


Note: Insert cable(s) before terminating.

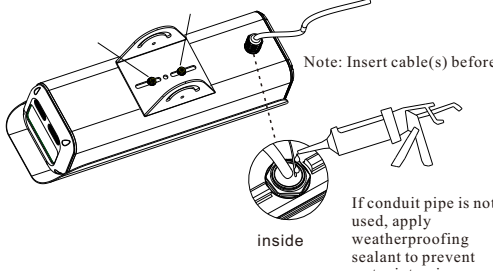

inside

If conduit pipe is not used, apply weatherproofing sealant to prevent water intrusion.


2. Fix the part1 to the camera with two screws.

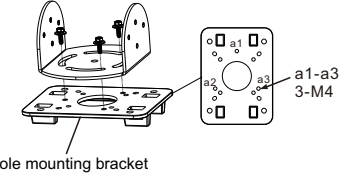


Pole mounting bracket

a1-a3
3-M4


3. Fix the part2 onto the pole mounting bracket with screws as shown above.

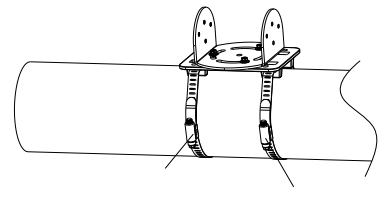

4. Fasten the pole and the pole mounting bracket with the part2 together .

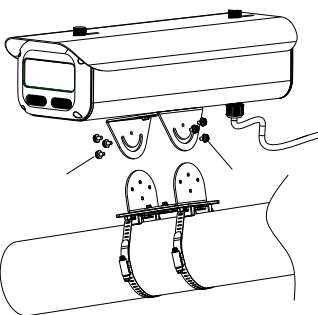

5. Secure the part1 and part2 with the screws indicated above.

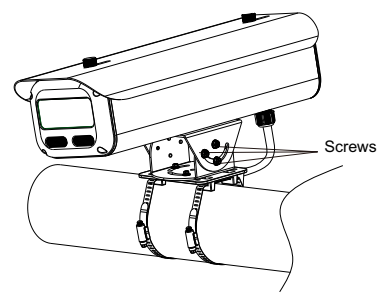

Screws

6. Connect the cables and then adjust the view angle of the camera by loosening the screws indicated above. After that, tighten these screws.

5 Web Operation and Login

IP Scanner can search for the device on the local network.

● Operation

- ① Make sure that the camera and the PC are connected to the same local network. The camera is set to DHCP by default.
- ② Install IP Scanner from the CD and run it after installation. Or download IP Scanner or Speco Blue Scanner from <https://www.specotech.com>

Status	Model Name	Name	IP Address	MAC Address	Wireless IP Address	Zero Config IP
Online		O4BXLPI1M	192.168.17.251	5C:F2:07:24:28:6A	n/a	n/a

- ③ In the device list, you can view the IP address, model number, and MAC address of each device. Select the applicable device and double click to open up the web viewer. You can also manually enter the IP address in the address bar of the web browser.

speco technologies


Username

Password

Login Cancel

The login interface is shown above. Default user name is admin and password is 1234. After logging in, follow directions to install applicable plugins if prompted.

Installation Height Requirement

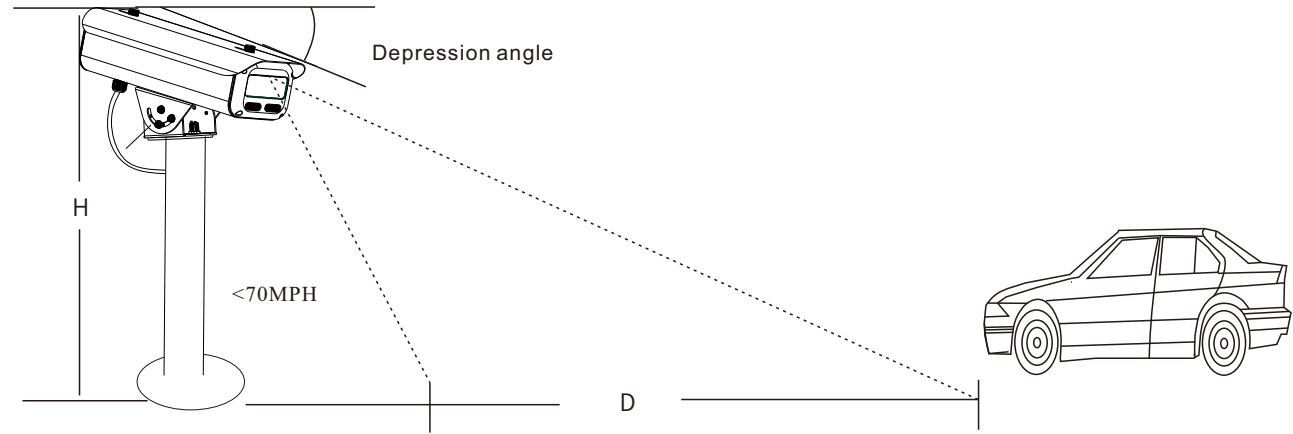

Lens: 8-32mm

Installation Height(H) : 15~ 20ft

Recommended Plate Capture Distance(D): 23-115ft

Please ensure the depression angle of the camera installed is within 25°.

The camera is available for a 8~13ft wide lane.

Caution: Be mindful when positioning the camera as its built-in illumination may cause temporary glare to approaching drivers.