IP Speaker Quick Start Guide

SPIPH8AMIO




Features

- Built-in Ethernet port and interfaces for easy connection and clean design.
- Durable ASA material suitable for harsh outdoor environments.
- Built-in microphone supports two-way intercom communication.
- Supports real-time voice recording.
- Customizable large built-in storage can store recordings and audio files.
- Compatible with standard SIP and ONVIF protocols.
- PoE eliminates the need for local power supply.
- Supports RTP Multicast, pre-recorded messages, schedule, and HTTP API.


Protocol	SIP, ONVIF, HTTP, HTTPS, IPv4, TLS, RTSP, RTP, RTCP, DHCP, DNS, NTP, TCP, UDP, IGMP, ICMP, ARP, SNMP v1/v2c/v3, Bonjour
Codec	OPUS 48KHz, MP3 44.1KHz, G.722-ADPCM 16KHz, G.711-PCMU 8KHz, G.711-PCMA 8KHz, G726 8KHz, GSM 8KHz, LPCM-16bit-Stereo/Mono 44.1kHz
Network Interface	10/100 Base-TX, RJ45
Rate Power	15W
Power Supply	PoE
MIC	Built in Microphone
Max SPL	113dB
Frequency Response	300Hz~8KHz
Material	ASA (durable and water-proof)
Interface	RJ45, IO Input, IO Output, DC 12V Output, Reset Button, MIC Control Switch
Operating Temperature	-30℃ — +60℃
Languages	English, Italian, Russian, Korean, Chinese Simplified & Traditional
Net Weight	1.4 KG
Dimensions	225 × 165 × 240mm

Hardware Interface

The SPIPH8AMIO IP Speaker includes built-in PoE, IO Input, IO Output, DC 12V Output, Reset Button, and MIC Control Switch. The Ethernet cable connects to the PoE port through the waterproof rubber grommet, while other interfaces are accessed by opening the rear cover.

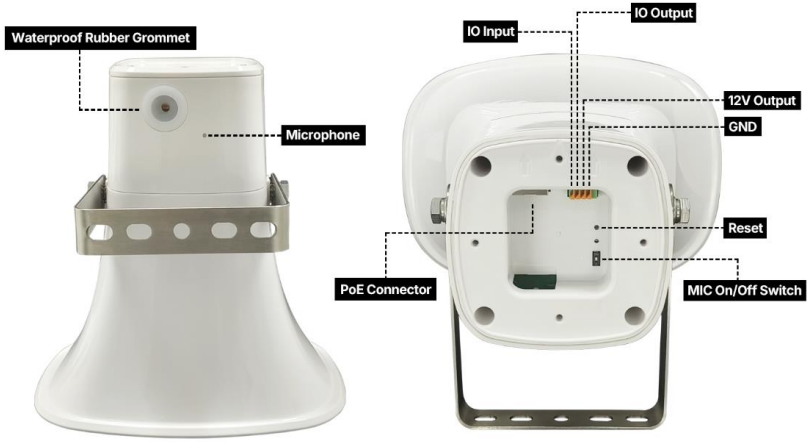

(5) Start your set up.

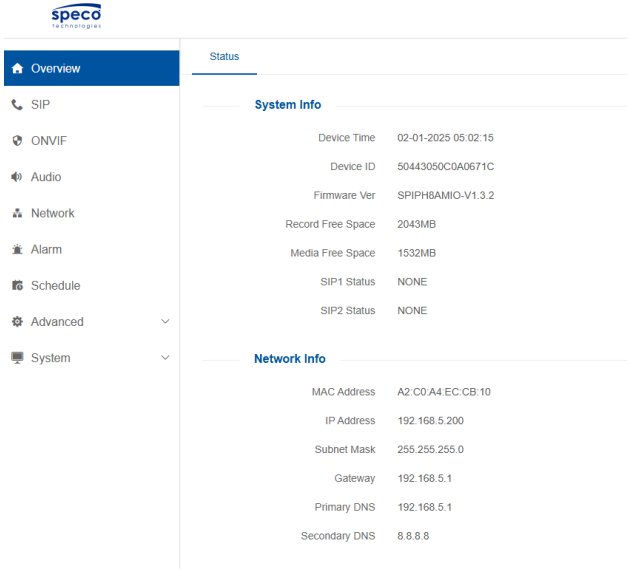

Configuration - Speco Scanner Tool

(1) Go to https://specotech.com/ip-scanner/ to download the Speco Scanner tool.

(2) Scan Local Area Network devices.

(3) Double click the IP address in the scanner to launch the web browser connection

(4) Enter the username and password.

Default user: admin

Password: 1234