



speco technologies[®]

Audio Microphone Series

User Manual

Model: CAMMIC3.5

Line level microphone with 3.5mm jack for use with IP
Cameras




Introduction

CAMMIC3.5 is a line level microphone designed to connect directly to IP cameras with a sensitivity of -65dB.

Features

- Records audio for a CCTV camera.
- Supports sensitivity at -65dB.
- Includes an 18" DC jack/audio cable.

Installation View

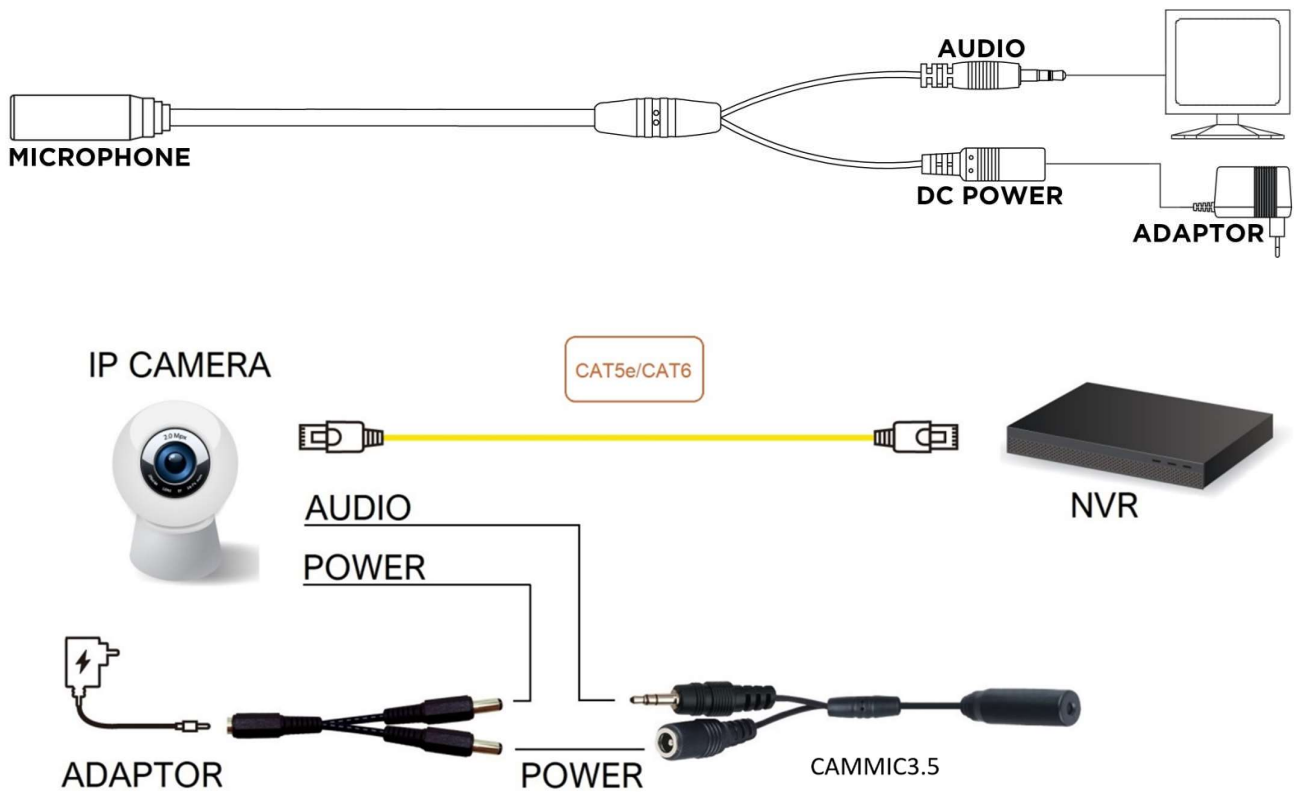

NOTE: Since the CAMMIC3.5 is a high-sensitivity microphone, it should be installed at least 15' away from any speakers to avoid audio reverberation.

Specifications

ITEM NO.	CAMMIC3.5
Support	
Sensitivity	-65dB (± 3 dB@ 1 KHz)
Frequency Response	30Hz to 16KHz
Ports & Interfaces	
Audio Output	1 x RCA Female Jack (2.2K Ω , 2V p-p)
Power Interface	1 x DC Plug
Power	
Power Supply	DC 12V (± 0.5 V)
Power Consumption	10 mA
Ambient Temperature	
Operation	14 to 113°F (-10 to 45°C)
Storage	-22 to 140°F (-30 to 60°C)
Humidity	Up to 95%
Physical Characteristics	
Dimensions	2 x 0.6 x 0.6" (50 x 14 x 14mm) & 18" (450mm) Cable
Weight	0.08 Lbs (35g)

RoHS CE FC 

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Speco Technologies . 200 New Highway . Amityville . NY . 11701 . www.specotech.com

Rev. 11/1//22