


STRXTNDR – Stereo/Mini-Stereo Audio CAT5 Extender

Features:


- Dual gold-plated RCA female + 3.5mm mini jack to RJ45.
- Choice of stereo or mini-stereo audio via dip switch.
- Passive operation – no power needed.
- Sold and used in pairs via CAT5 UTP cable to send stereo or mini-stereo audio signal up to 1968'.
- 20Hz to 20Khz (-3db) Bandwidth.
- High performance to eliminate audio ground loop.



Panel View:

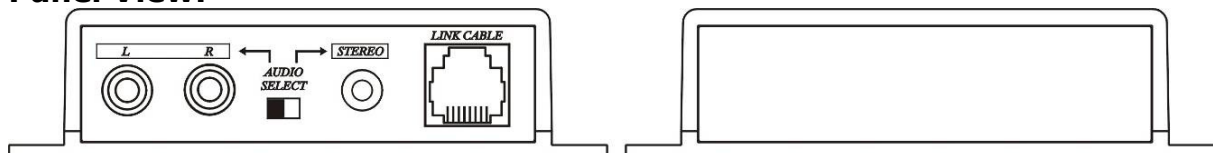

Installation View

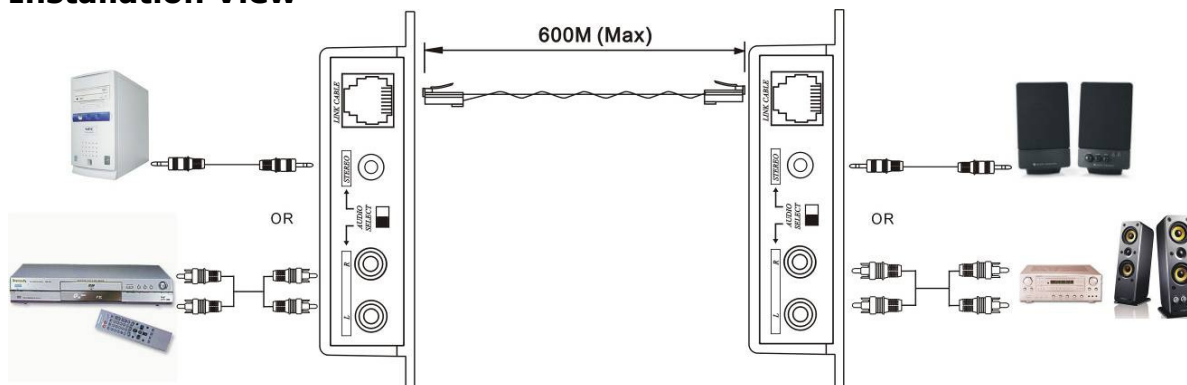

		RJ - 45 Jack	
PIN	Color	Function	
1	W-O	Audio R -	
2	O	Audio R+	
3	W-G	Audio L -	
4	BL	X	
5	W-BL	X	
6	G	Audio L +	
7	W-BR	X	
8	BR	X	

1 2 3 4 5 6 7 8
W-O O W-G BL W-BL G W-BR BR
JACK POSITION

Specification:

ITEM NO.	STRXTNDR
Audio Input/Output	2 x RCA, 1 x 3.5mm phone jack (10KΩ)
Link Connector	1 x RJ45
Link Cable	Twisted Pair CAT5/5e/6 UTP
Dimensions L x W x H	4.3" x 2.8" x 1"
Weight	0.2 Lbs.



Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.