

Network Keyboard

SBPTZJOY

Features

- Supports remote upgrading by Web client
- Support PTZ mode, serial port mode, platform mode, up to 256 speed domes controllable in PTZ mode
- Supports keypad tone



Specifications

Local Parameters

Display	TFT LCD 320*240
Operation Interface	4D Joystick, Knob, Buttons

Network Parameters


Interface	1 RJ45 10/100M adaptive Ethernet port
Control Mode	PTZ mode, platform mode and serial port mode
Network Management	The software can be upgraded by WEB client

Serial Port Parameters

Serial Port	RS422 x1; RS232x1
Baudrate	1200bps, 2400bps, 4800bps,9800bps, 19200bps

Other Specifications

Power	DC12V 2A
PoE	Supports PoE power supply (IEEE802.3 af)
Power Consumption	<5W
Working Temperature	14°F-131°F / -10°C-55°C
Working Humidity	20%-80% (non-condensing)
Storage Temperature	14°F-140°F / -10°C-80°C
Storage Humidity	0-90%(non-condensing)
Dimensions(inches)	12.64 x 7.06 x 4.27 inches
Net weight (pounds)	Approx. 3.59 pounds

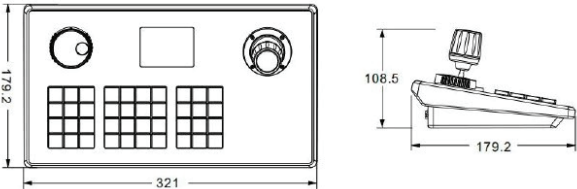

NDAA COMPLIANT

Products are in compliance with NDAA Section 889 Part B Guidelines. ONVIF® is a trademark of Onvif, Inc. Chrome® and Firefox® use Java™, which requires an initial internet connection. Apple® and the Apple logo® are trademarks of Apple Inc., registered in the U.S. and other countries. App Store® is a service mark of Apple Inc. Android™ is a trademark of Google LLC. Google Play® and the Google Play logo® are trademarks of Google LLC. Amazon® is a trademark of Amazon.com, Inc. or its affiliates, used under license. Speco Technologies® is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Revised 10/17/25