



Solar Powered Panel with Mounting Hardware

SXP400


(2) 200w solar panels, enclosure, charge controller, PoE switch

Features

- 1 Solar panel and mounting hardware included
- 2 Weather-proof aluminum enclosure and mounting hardware included
- 3 Lockable wing-knob; locks with pad lock (pad lock not included)
- 4 Hardwired PoE switch, converters, and charging equipment, are self-contained and safeguarded against environmental factors and tampering

*SIM card not included

Network Operator Certifications: AT&T®, T-Mobile®, Verizon®

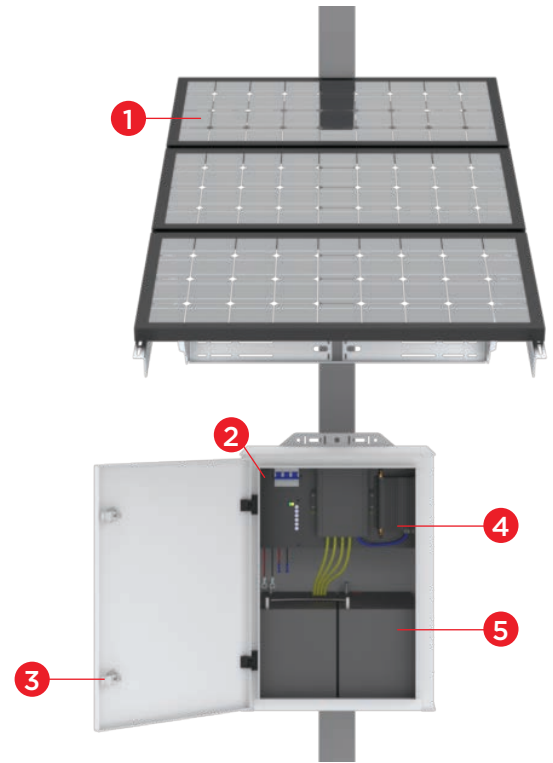


Solar Panel Specifications

Part Number	SXP400
Number of Panels	(6) 100W
Individual Panel Dimensions	40"(L) x 27"(W)
Panel Weight (With Mount)	120 lbs.
Recommended Pole Size	8" Pole
Wind Rating	100 mph
Output Voltage	24VDC
Solar Charge Controller	Advanced charge control with max power point tracking (MPPT) algorithm

Enclosure Specifications

Enclosure Size	32"(H) x 24"(W) x 16"(D)
Battery Capacity	(4) 100Ah batteries (not included)
100Ah Battery Size*	9.2" (H) x 12.3" (W) x 6.7"(D)
Enclosure Weight	28 lbs.
Pole Size	4" to 6" (recommended, straps not included)
Material	Aluminum
Operating Temperature	-40°F - 140°F

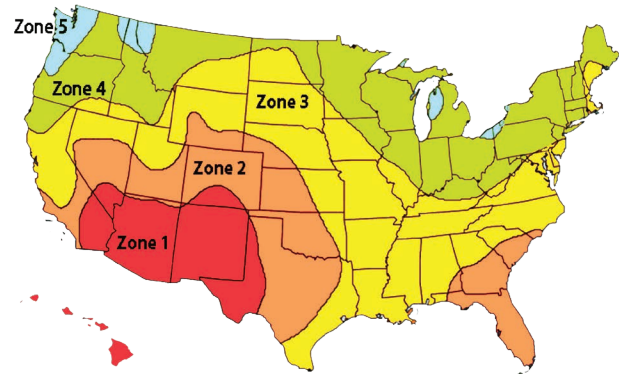

Zone Key

Remaining Wattage for Camera Use					
Most Sunlight ← ← ← ← ← ← Least Sunlight					
Solar Array Size	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
400W	55W	45W	33W	21W	9W
802.3 af - up to 15.4W					
802.3 at - up to 25.5W					
Not recommended for Alaska or Canada					

Speco Technologies® is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Revised 10/29/25