

Solar Powered Panel with Mounting Hardware

SXP600


(6) 100W solar panels, enclosure, charge controller, PoE switch

Features

- 1 Solar panel and mounting hardware included
- 2 Weather-proof aluminum enclosure and mounting hardware included
- 3 Lockable wing-knob; locks with pad lock (pad lock not included)
- 4 Hardwired PoE switch, converters, and charging equipment, are self-contained and safeguarded against environmental factors and tampering
- 5 Battery capacity of up to 4 x 100 Ah batteries


*SIM card not included

Network Operator Certifications: AT&T®, T-Mobile®, Verizon®

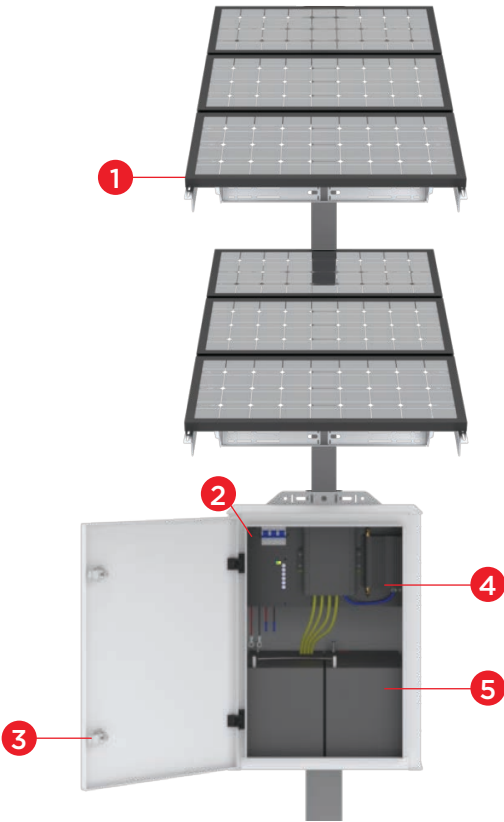

Solar Panel Specifications


Number of Panels	(6) 100W
Individual Panel Dimensions	40"(L) x 27"(W)
Panel Weight	120 lbs.
Recommended Pole Size	3" - 6" schedule 40 rigid metal or stronger (straps not included)
Wind Rating	100 mph
Output Voltage	24VDC
Solar Charge Controller	Advanced charge control with max power point tracking (MPPT) algorithm

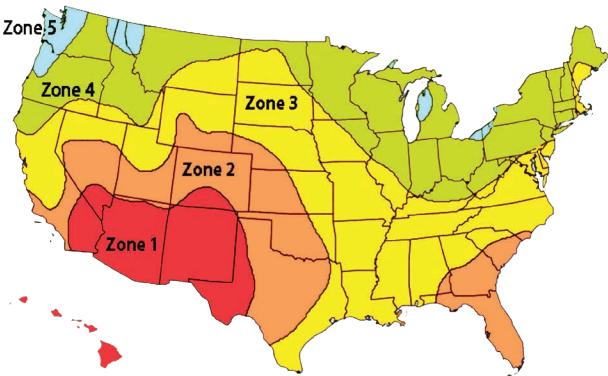

Enclosure Specifications

Enclosure Size	32"(H) x 24"(W) x 16"(D)
Battery Capacity	(4) 100Ah batteries (not included)
100Ah Battery Size*	9.2" (H) x 12.3" (W) x 6.7"(D)
Enclosure Weight	38 lbs.
Pole Size	3" - 6" schedule 40 rigid metal or stronger (straps not included)
Material	Aluminum
Operating Temperature	-40°F - 140°F

Zone Key

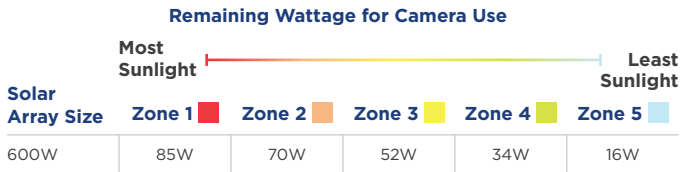

Speco Technologies® is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Revised 10/22/25

802.3 af - up to 15.4W
802.3 at - up to 25.5W
Not recommended for Alaska or Canada