

IP

802.3af/at Gigabit PoE Injector

POEINJ30

Power & Networking




NDAA
COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines



Connection Diagram

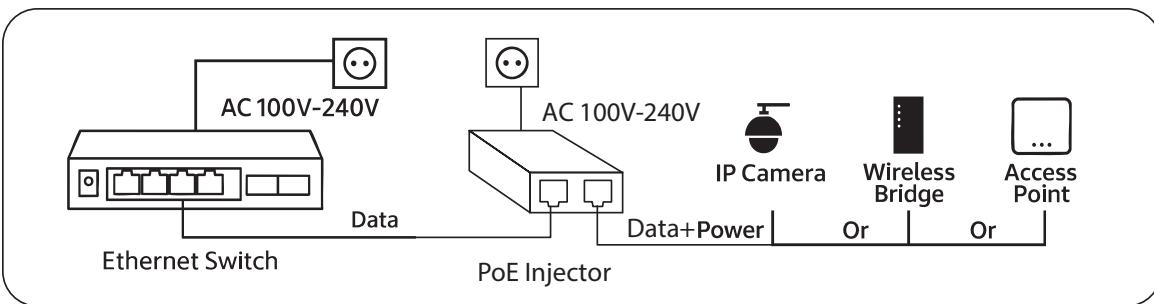

Interfaces



PoE Injector Specifications

Model	POEINJ30
Max. Power Output	30W
PoE Standard	IEEE802.3af, IEEE802.3at
PoE Specification	POE PORT OUTPUT DC52V @ 0.58A POE POWER PIN: 1/2-;3/6+OR 4/5+; 7/8-
Network Protocol	IEEE802.3 (Ethernet) 54, IEEE802.3u (Fast Ethernet), IEEE802.3ab (Gigabit Ethernet)
Network Media	10BASE-T: Cat5 UTP (<250m) 100BASE-TX: UTP (<100m) above Cat5 1000BASE-TX: UTP (<100m) above Cat5
Working Environment	Working Temperature: -4F - 122F, -20°C - 50°C Storage Temperature: -40F - 188F, -40° -85°C Humidity: 5% - 95% (Non-condensing)
Certification	CE, FCC, RoHS

	Injector: 1
	Certificate of Conformity: 1
	Quick Guide: 1
	Power Cord: 1

- Warnings and Cautions**
- WARNING:** Always ensure this device is properly grounded during operation.
- CAUTION:** Contact your local distributor for shortages or damaged parts.
- Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. We are not responsible for typographical errors. (c) 2026 Speco Technologies. All rights reserved.

Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. **Spec Rev. 1/13/26**

800-645-5516 • Fax: 631-957-9142 or 631-957-3880 • www.specotech.com

PoE Injector

POEINJ30



speco
technologies