



Installation Guide

Strobe Speaker


SPIPSTROBE

Strobe Speaker Install Guide


Please read carefully before you do the installation.

Installation Method 1: Mounting Plate for Wall & Ceiling


1. Drill 3 holes on the wall according to the back plate hole patterns.
Hole Diameter: 6 mm, Hole Depth: 30 mm.

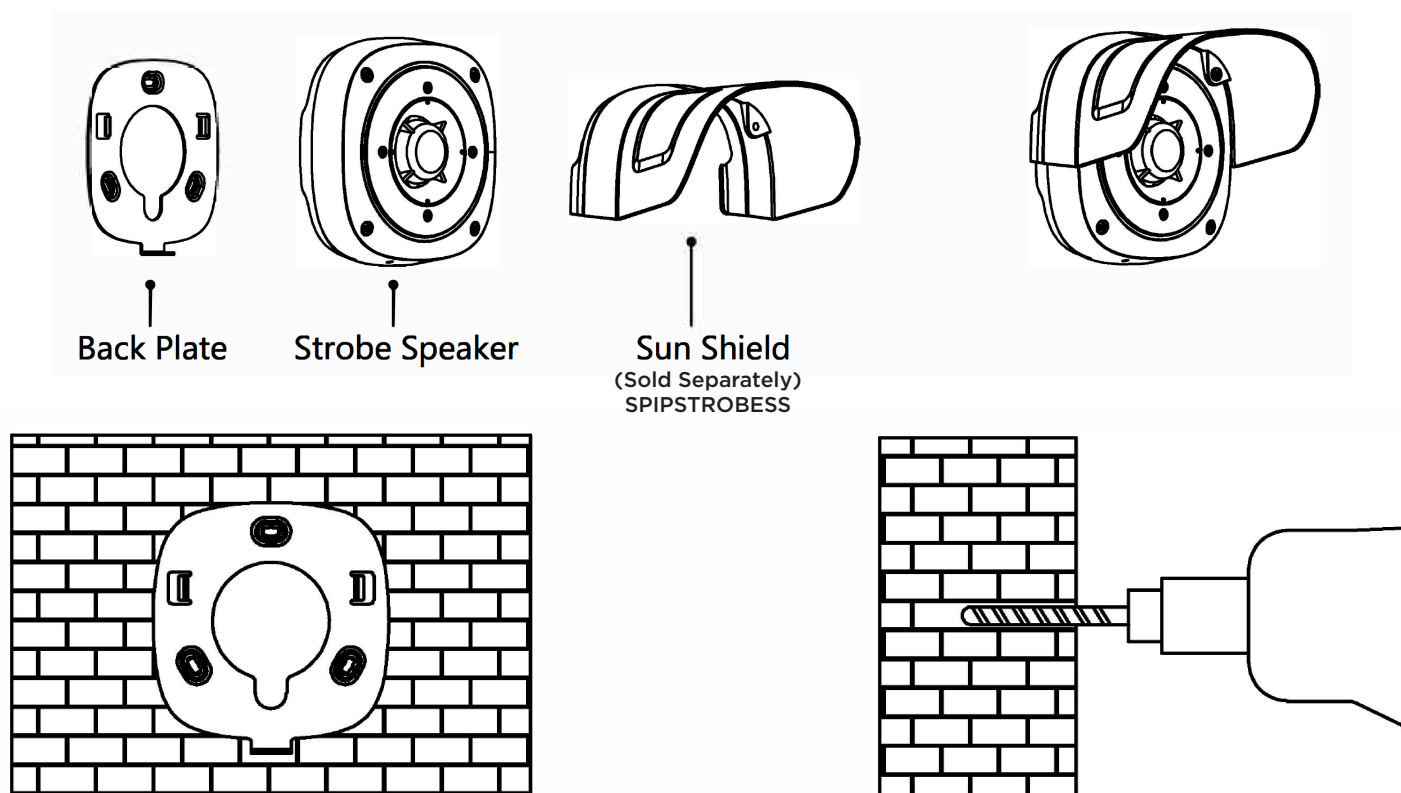


2. Drive 3 pieces of M4x30 mm plastic expansion anchors into the wall.

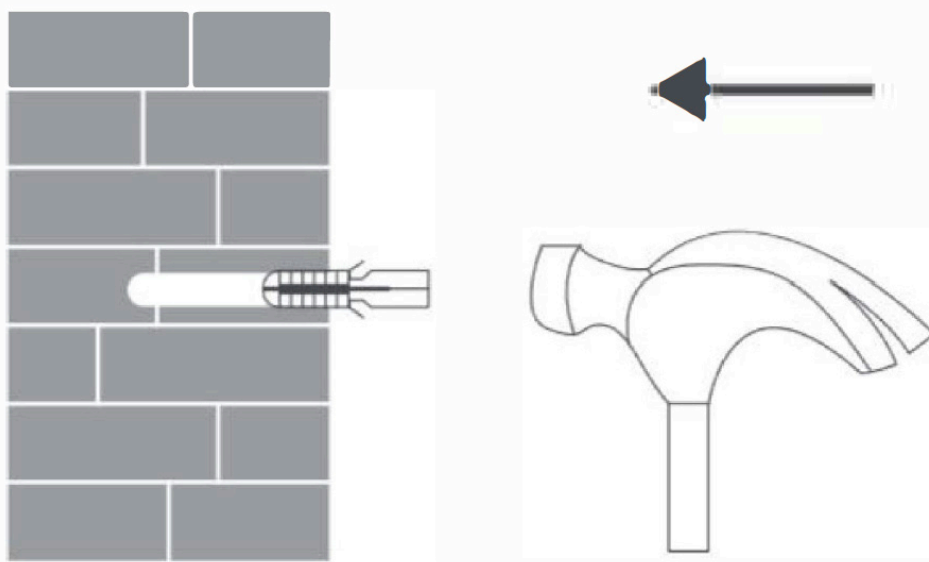

3. Attach the back plate to the wall, insert 3 pieces of M4x30 mm screws through the holes, and tighten them into the expansion anchors on the wall.

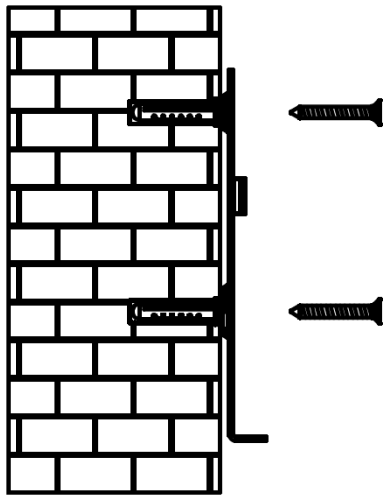


Wall Mount

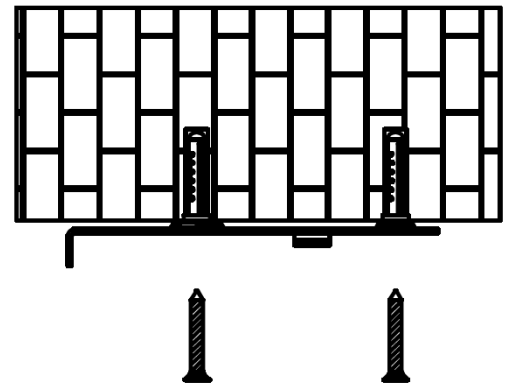


Ceiling Mount

4. Secure the strobe speaker to the back plate and tighten with M4x 10 mm screws. If a sun shield is required, replace the screws with M4x35 mm ones.

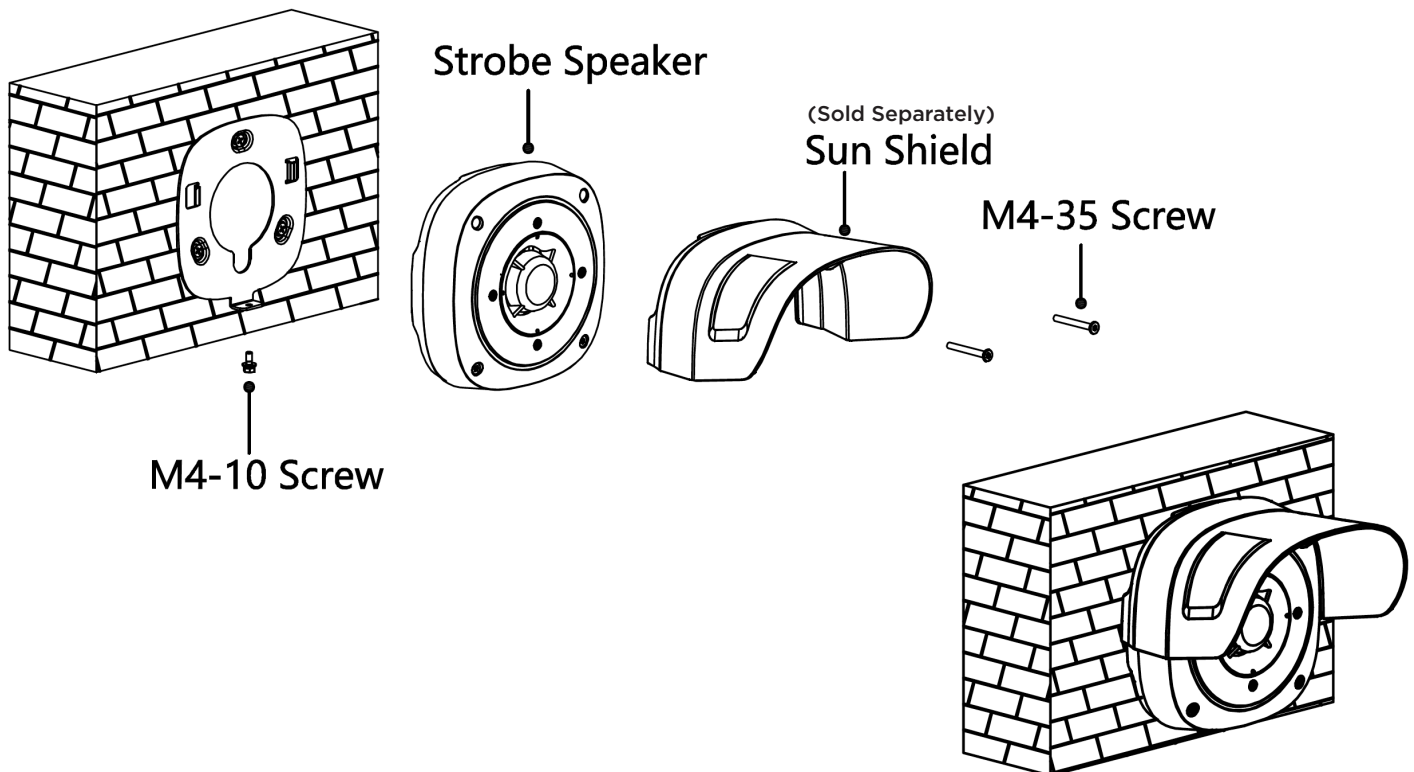

Installation Method 2: Universal Wall Mount

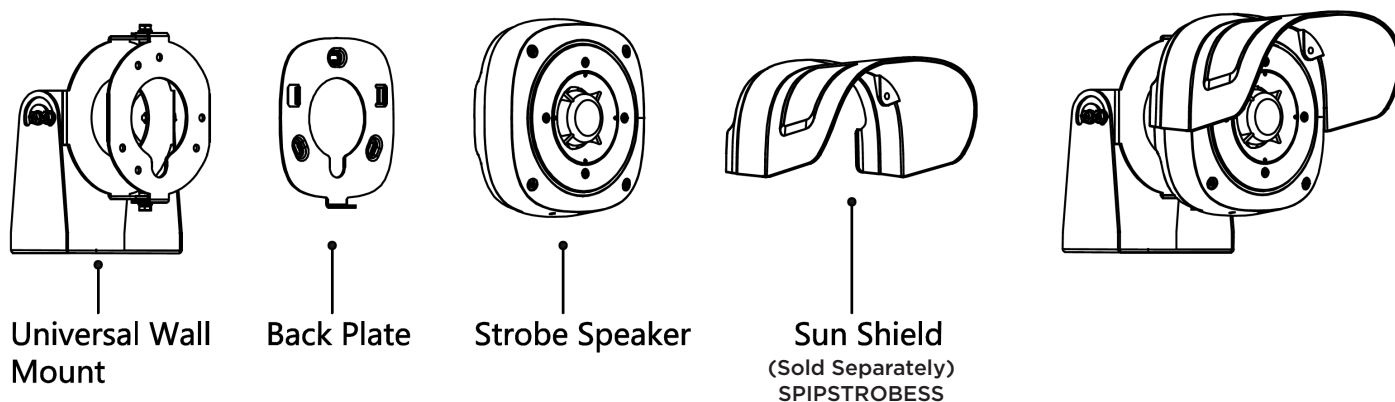

1. Secure the universal wall mount to the enclosure with M6x 12 mm screws. Then attach the back plate and strobe speaker in sequence with M4x8 mm and M4x10 mm screws. Replace with M4x35 mm screws if a sun shield is required.

