
Intensifier® Series HD-TVI 1080p 2MP Dome Camera Wall/Ceiling Mount, UTC, 2BNC out for TVI & CVBS, Dual voltage




200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com


HT7246T2 - 2.8~12mm auto iris lens, dark gray housing

DIMENSIONS

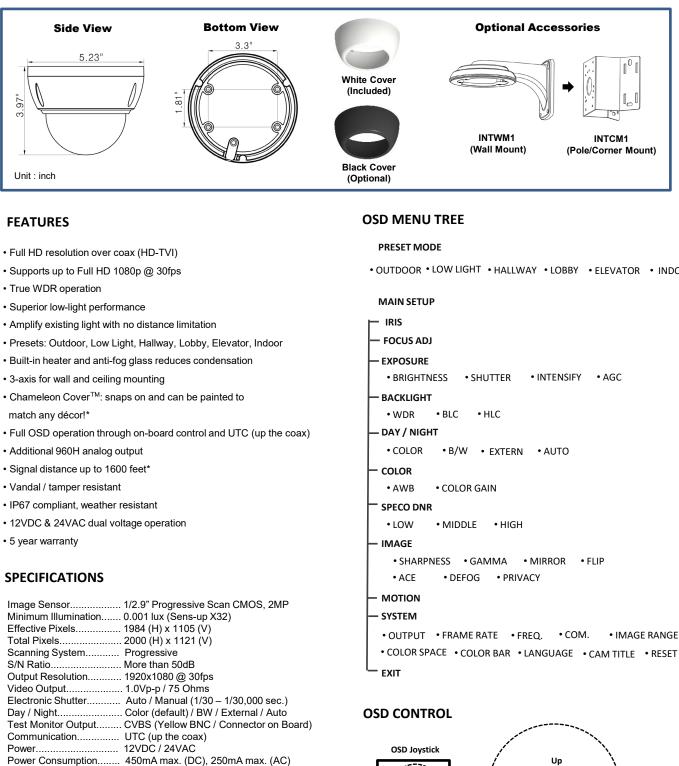



• OUTDOOR • LOW LIGHT • HALLWAY • LOBBY • ELEVATOR • INDOOR



HT7246T2 - 2.8~12mm auto iris lens, dark gray housing



200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com

OSD MENU Details

IRIS : 'ALC' as a default value

EXPOSURE : adjusts exposure settings.

BRIGHTNESS : Adjusts image brightness. (0~ 20) SHUTTER : Outdoor / Indoor / Deblur INTENSIFY : Sets the desired multiple of the digital exposure length. AGC(Auto Gain Control): Adjusts the AGC level. (0~10)

BACKLIGHT : Adjusts backlight options.

WDR : WDR illuminates darker areas of an image while retaining the same light level for brighter areas to even out the overall brightness of images with high contrast between bright and dark area

- Adjusts the WDR Weight (LOW/MIDDLE/HIGH)

* CVBS out cannot adjust this function.

- BLC : Produces a clearer image of an object darkened by strong backlighting.
- H-POS : Adjusts the horizontal position(0~20)
- V-POS : Adjusts the Vertical position(0~20)
- H-SIZE : Adjusts the horizontal block size (0~20)
- V-SIZE : Adjusts the vertical block size (0~20)
- HLC : Uses to contain extremely bright areas such as from car headlight, the light can be masked out much of the on-screen details.

DAY / NIGHT : Adjust Day / Night options.

COLOR : Always Color mode, Default value for these cameras B/W : Always B/W mode.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)
- EXT : please do not use this mode for these cameras
- AUTO : Day / Night is switching automatically by AGC level.
- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)
- AGC THRES : Adjusts AGC THRES (0~20)
- AGC MARGIN : Adjusts AGC margin (0~20)
- DELAY : Adjusts the changing delay time (LOW/MIDDLE/HIGH)

COLOR : Adjusts white balancing options.

AWB : it goes to optimized color level automatically. COLOR GAIN : Sets the desired Color Gain value (0~20)

SPECO DNR : Uses to reduce the background noise in a low luminance environment with 2D + 3D filtering system.

IMAGE : Adjusts various image options.

SHARPNESS: Adjusts sharpness level. Increasing this value, the picture outline becomes stronger and clear. (0~10)

GAMMA : Sets the desired Gamma value. (0.45 ~ 0.75)

MIRROR : Change the video direction horizontally.

FLIP: Change the video direction perpendicularly.

ACE (D-WDR) : Uses a digital wide dynamic range to balance dark and over saturated areas within the image.

DEFOG : Activated this mode when the video or the weather is foggy. PRIVACY : Used to hide regions of the image.

MOTION : Adjust motion detection settings.

DET WINDOW DET TONE MDRECT FILL SENSITIVITY : Sets the desired of "Motion" (0~20) MOTION OSD **TEXT ALARM** SIGNAL OUT

SYSTEM : Adjusts various camera system options. OUTPUT MAIN OUTPUT ANALOG OUTO ANALOG OUT0 TVI Y GAIN CB GAIN CR GAIN POSITION **BURST FREQ BURST GAIN** B&W UCC SELECT 720EX FRAME RATE: 1080P 30 / 720P 60 FREQ 60Hz COM. **IMAGE RANGE** COLOR SPACE COLOR BAR : Manufacturer's option LANGUAGE : Sets the desired OSD language CAM TITLE RESET: Press with long to reset all settings to factory defaults.

speco technologies

LIMITED WARRANTY - VIDEO PRODUCTS

THIS WARRANT I TO VALID ONLY ON PRODUCTS PURCHASED AND USED IN T UNITED STATES OF AMERICA AND CANADA, THIS WARRANTY APPLIES ONLY THE ORIGINAL USER.

SUBJECT TO CONDITIONS AND EXCLUSIONS FOUND BELOW, THIS PRODUCT IS WARRANTED AGAINST MANUFACTURING DEFECTS IN MATERIAL AND WORKMANSHIP FOR THE FOLLOWING PERIOD FOR PARTS AND LABOR:

LEDS	PECO TECHNOLOGIES IP CAMERAS5 YEARS NVRS PECO PTZ	55 YEARS 5
------	--	---------------

SPECO TECHNOLOGIES WILL REPAIR OR REPLACE (AT OUR DISCRETION) ANY PARTS FOUND TO BE DEFECTIVE FOR THE WARRANTY PERIOD SPECIFIED. WE WILL PROVIDE A REPLACEMENT FOR ANY DEFECTIVE PART.

CONDITIONS

SP SP SP SP

IR

1. YOU MUST OBTAIN A RETURN AUTHORIZATION (RA) NUMBER FOR ANY MERCHANDISE BEING RETURNED TO SPECO TECHNOLOGIES, WHETHER FOR RETURN/EXCHANGE OR REPAIR, WHETHER IN OR OUT OF WARRANTY.

- 2. THIS WARRANTY WILL BE HONORED ONLY UPON PRESENTATION OF THE ORIGINAL DATED BILL OF SALE OR SALES SLIP.
- 3. TRANSPORTATION OF THE PRODUCT TO OUR SERVICE DEPARTMENT IS THE RESPONSIBILITY OF THE USER. REPAIRED OR REPLACED PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.
- PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD. SPECO TECHNOLOGIES DOES NOT AUTHORIZE AN INTERNET OF NALL ORDER PRODUCT SALES. IF A SPECO TECHNOLOGIES PRODUCT IS PURCHASED FROM AN UNAUTHORIZED DISTRIBUTOR OR OTHER SOURCE, INCLUDING RETALERS, MAIL ORDER SELLERS AND ONLINE SELLERS, IT WILL NOT EE HONORED OR SERVICED UNDER THE EXISTING SPECO TECHNOLOGIES WARRANTY POLICY ANY SPECO TECHNOLOGIES PRODUCT PURCHASED FROM THESE ONLINE MERCHANTS WILL VOD THE APPLICABLE WARRANTY AND IS INELIGIBLE FOR TECHNICAL SUPPORT. IF YOU HAVE QUESTIONS ABOUT A RESELLER, PLEASE CONTACT SPECO TECHNOLOGIES AT 1-800-645-5516 FOR A LIST OF UNAUTHORIZED DEALERS, VISIT, WWX.Specotech.com/unauthorized.

EXCLUSIONS

- 1. THIS WARRANTY SHALL NOT COVER ADJUSTMENT OF CUSTOMER OPERATED CONTROLS AS EXPLAINED IN THE APPROPRIATE MODEL'S INSTRUCTION MANUAL OR PRODUCTS WHICH HAVE BEEN ALTERED, ABUSED, OR HAVE MISSING OR ALTERED SERIAL NUMBERS.
- 2. THIS WARRANTY SHALL NOT APPLY TO UNCRATING, SETUP, INSTALLATION, OR THE REMOVAL AND REINSTALLATION OF PRODUCTS AFTER REPAIR.
- AT LEN RAPARATY SHALL NOT APPLY TO REPAIRS OR REPLACEMENTS NECESSITATED BY ANY CAUSE BEYOND THE RESULT OF MANUFACTURE INCLUDING, BUT NOT LIMITED TO, ANY MALFUNCTION, DEFECTS OR FALLINE CAUSED BY OR RESULTING FROM UNAUTHORIZED SERVICE OR PARTS, IMPROPER MAINTENANCE, MODIFICATION OR FEMAIR BY THE USER, ABUSE, MISUES, INEQLECT ACCIDENT, FIRE, FLODD, OR OTHER ACTS OR NATURE, INCORRECT LINE VOLTAGE, DAMAGE OR IMAGE BURNS TO TELEVISION PICTURE TUBES CAUSED BY OR ARTIRIUTABLE TO THE USE OF ANY ACCESSORY, ELECTRONICS GAME OR DEVICE, OR DAMAGE CAUSED TO IMAGE PICKUP DEVICES BY EXCESSIVE LIGHT.

THE FOREGOING IS IN LIEU OF ALL OTHER EXPRESSED WARRANTIES AND WE DO NOT AUTHORIZE ANY PARTY TO ASSUME FOR US ANY OTHER OBLIGATION OR LIABILITY. IN NO EVENT SHALL WE BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF THIS PRODUCT, OR FOR ANY DELAY IN THE USE OF THIS PRODUCT DUE TO CAUSES BEVOND OUR CONTROL, SOME STATES DO NOT ALLOW LIMITATIONS OF HOW LONG AN IMPLED WARRANTY LASTS AND/OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF CONSEQUENTIAL DAMAGES. THE ABOVE LIMITATIONS ON IMPLED WARRANTY AND CONSEQUENTIAL DAMAGES MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

NOTE: FOR YOUR PROTECTION IN THE EVENT OF THEFT OR LOSS OF THIS PRODUCT, PLEASE FILL IN THE INFORMATION REQUESTED BELOW AND RETAIN WITH YOUR SALES RECEIPT.

	SERIAL NO.:
(LOCATED ON BACK OR BOTTOM OF UNIT)	
DATE OF PURCHASE:	
WHERE PURCHASED:	PURCHASE PRICE:



ALWAY'S USE DISCRETION WHEN INSTALLING VIDEO ANDIOR AUDIO SURVEILLANCE EQUIPMENT ESPECIALLY WHEN THERE IS AN EXPECTATION OF PRIVACY. INQURE REGARDING FEDERAL, STATE ANDOR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO ANDIOR ADDIOR RECORDING OR SURVELLANCE EQUIPMENT. PARTY CONSENT MAY BE REGUIRED.

12-300 5/12

Speco Technologies is constantly developing product improvements. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Rev. 231127