



Upgrade the recorder's firmware VIA the Web Browser


- 1) Go to <https://specotech.com> as shown below.

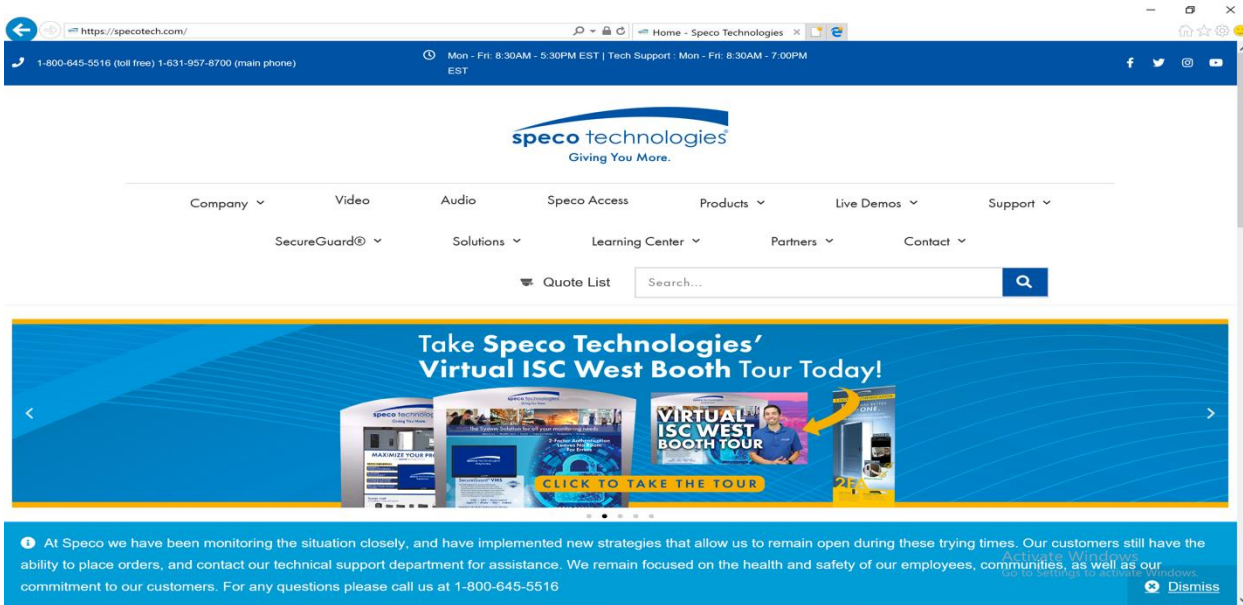


- 2) Type in the **model** of the **recorder** in the search tab as shown below. When the model number is entered click the **magnified glass** to search.

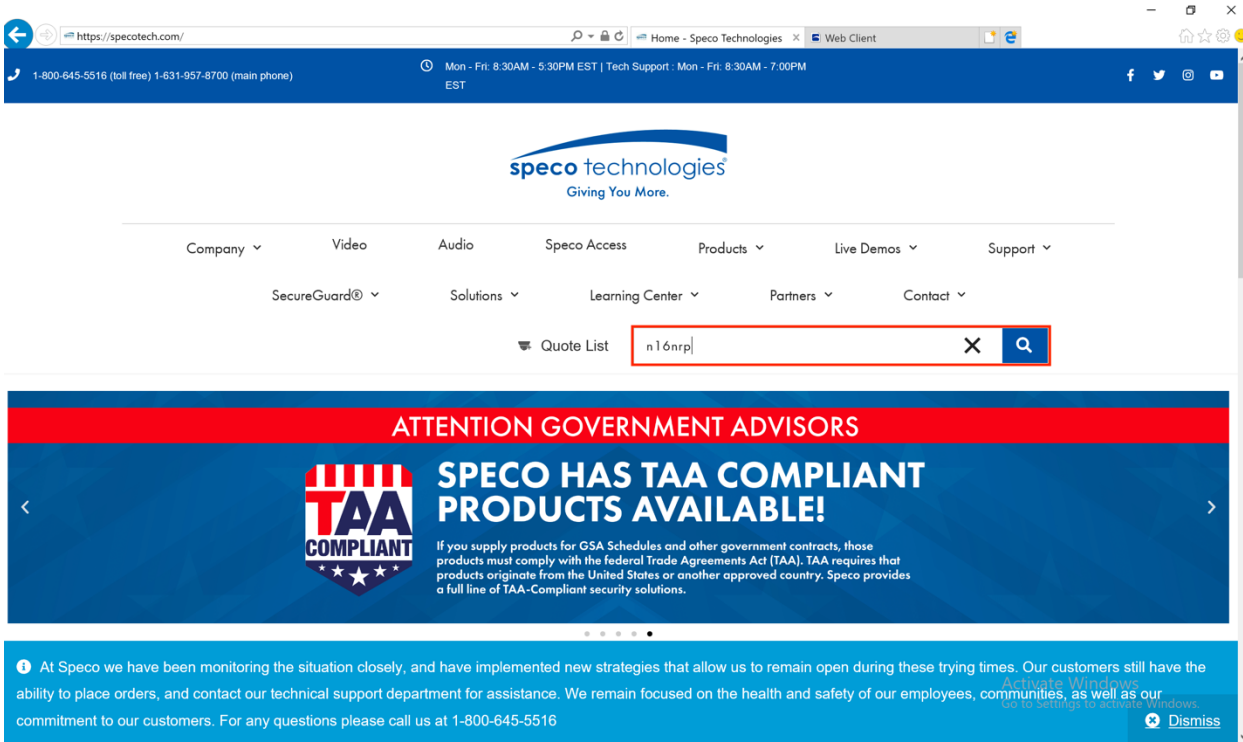

- 3) When you **search** for the **model** it will load the following page, click on the **name** of the **model** as shown below.

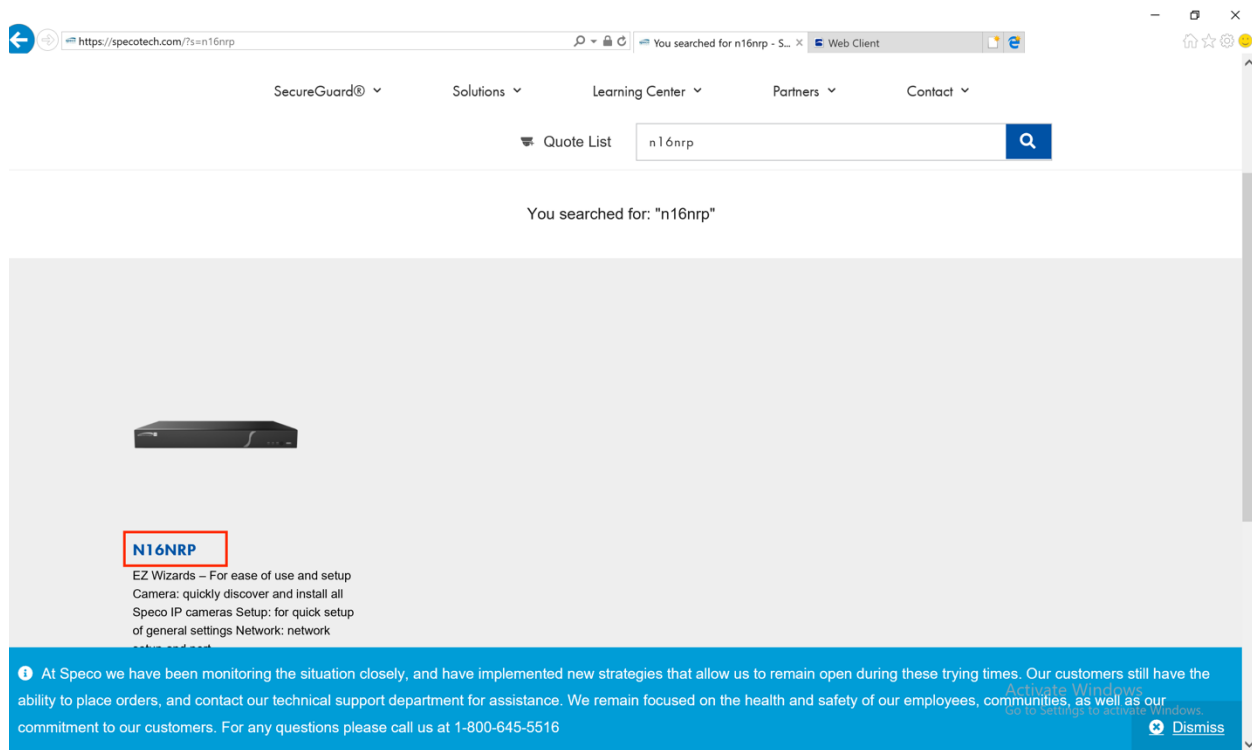


- 4) After you click on the **model** name it will load the product page. Scroll down on the product page to the **documents and software** tab. Click on the **software tab** as shown below. If the **model** doesn't have a **software tab** go to the following link to view the current software.

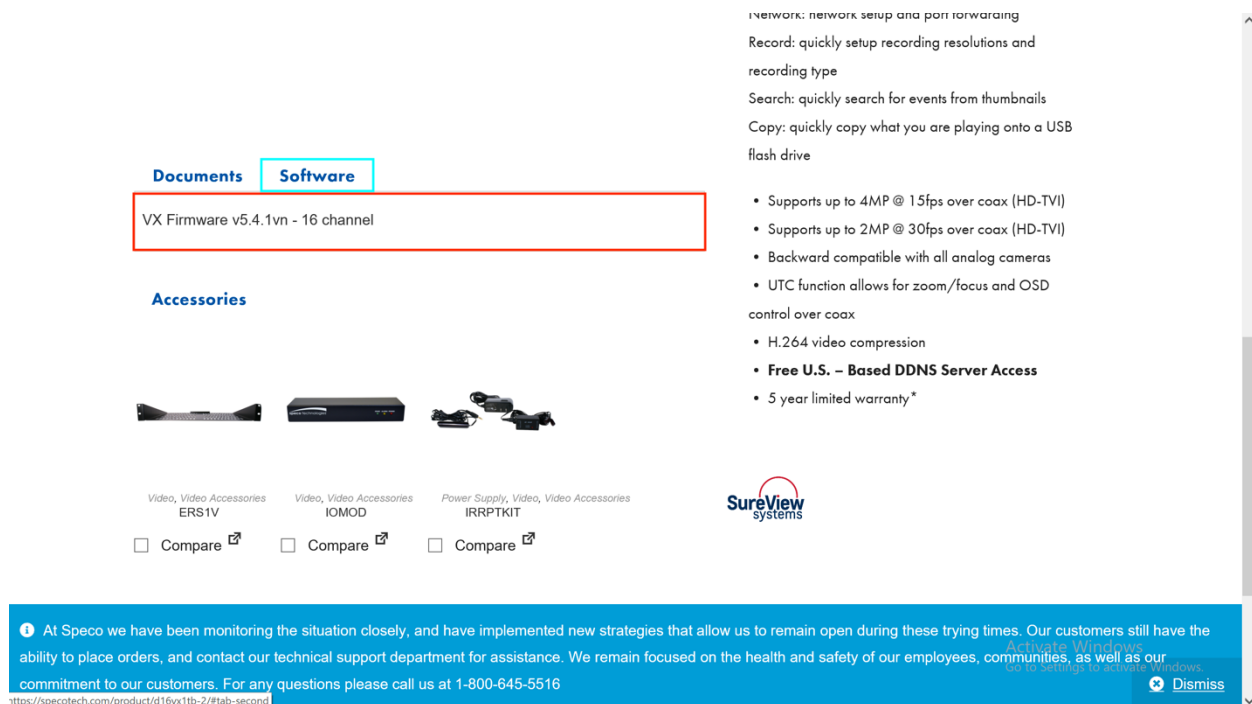


- 5) Click on the link under **software** to download the current **firmware**. You can choose where to save the file.


- 6) After downloading the current **firmware** go to <http://connect.specotech.cloud> and log into your **recorder** with the **QR code**, **username** and **password**. You will see the following image.

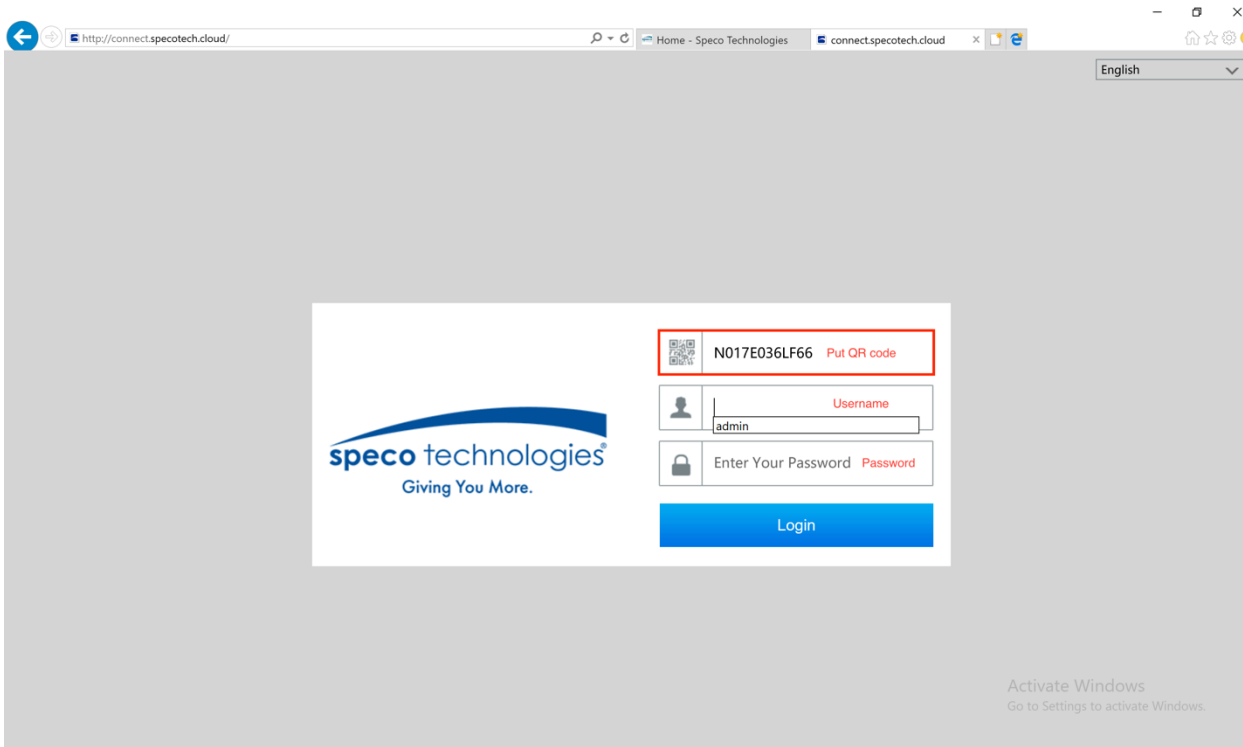


- 7) After you log into the **recorder** you will see the following screen. click on “**settings**” to get into the menu.

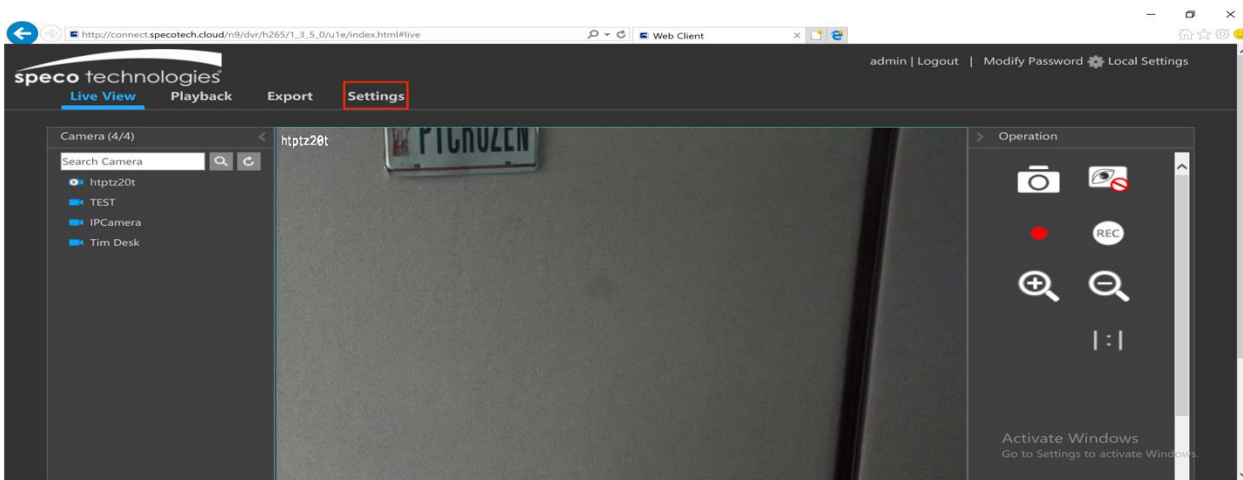


- 8) When you get into the “**settings**” menu you will see the following screen. Click on the “**System**” tab it will load the “**system**” page.

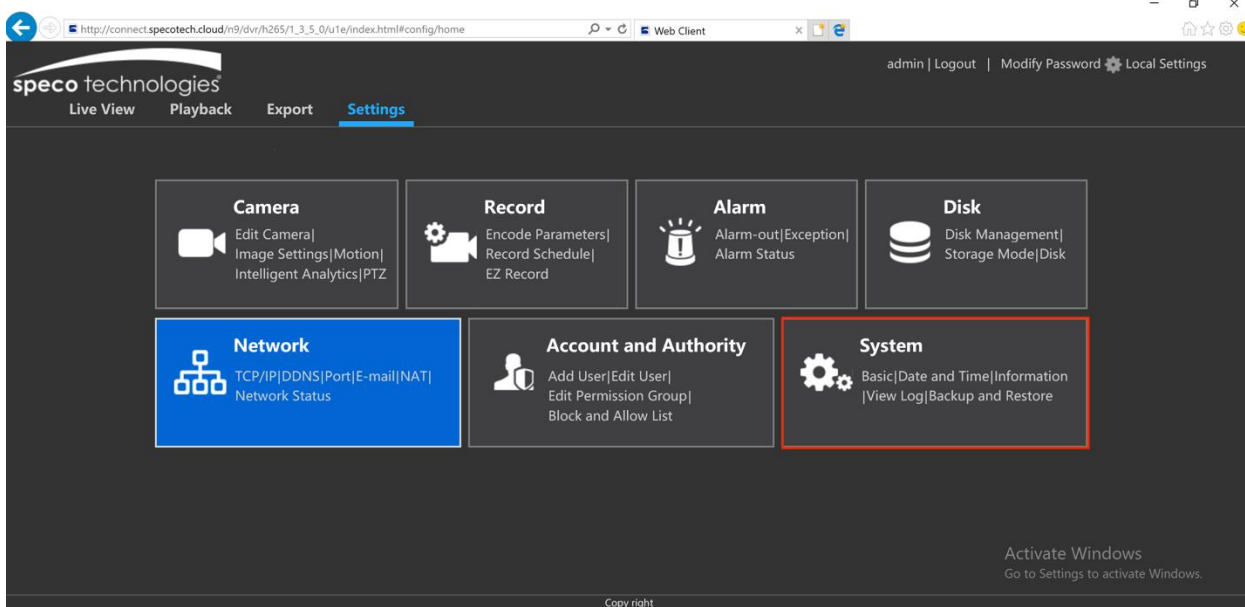


- 9) When the “**System**” tab loads you will see the following screen. Click on the “**maintenance**” tab as shown below.

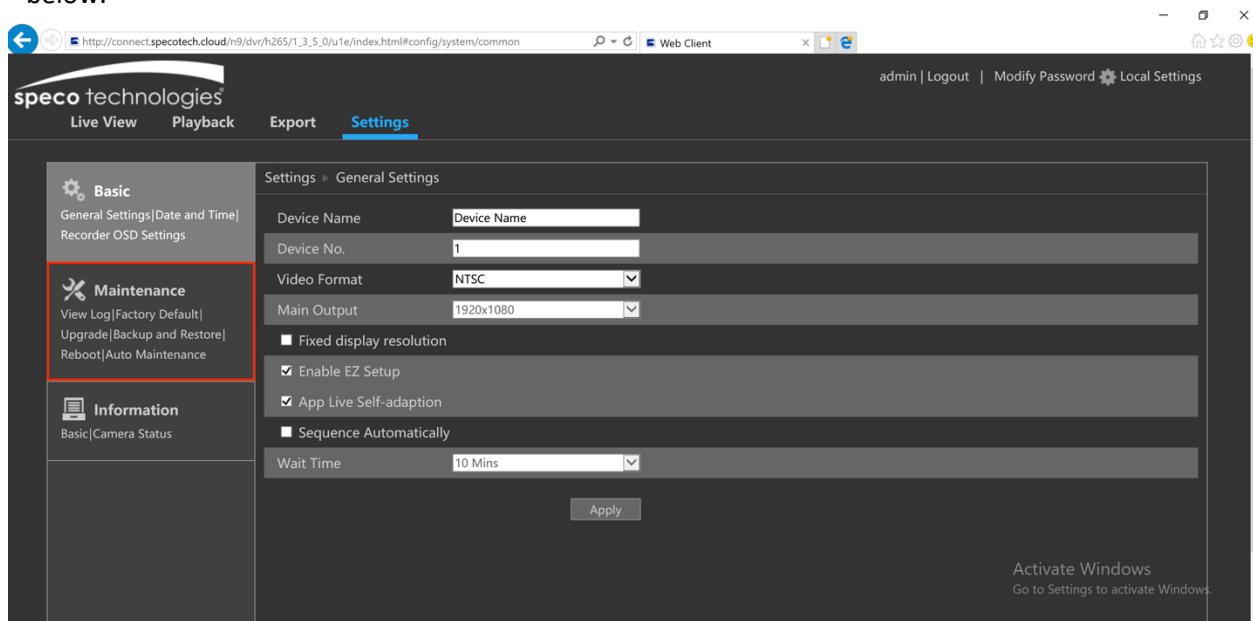

10) After you go to the “**maintenance**” tab click on “**upgrade**” tab as shown below.

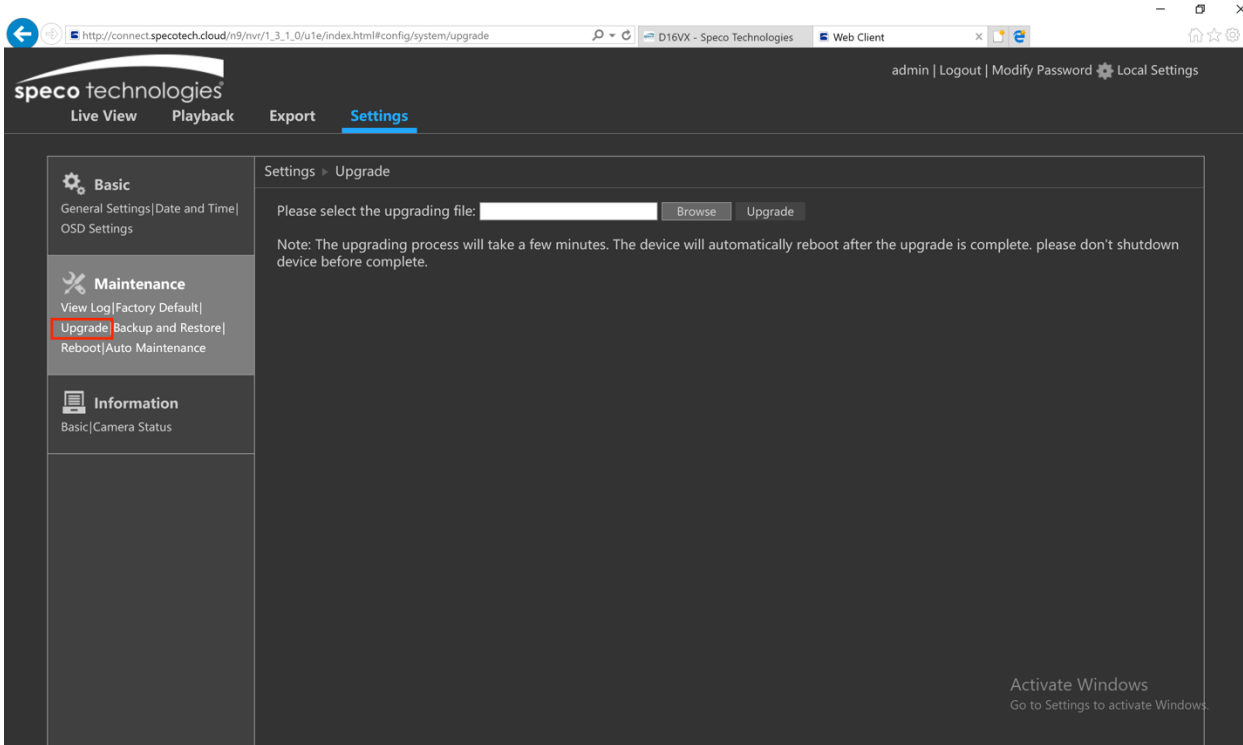

11) Browse your computer for the **upgrade file**, then click “**open**” when you find the file as shown below.

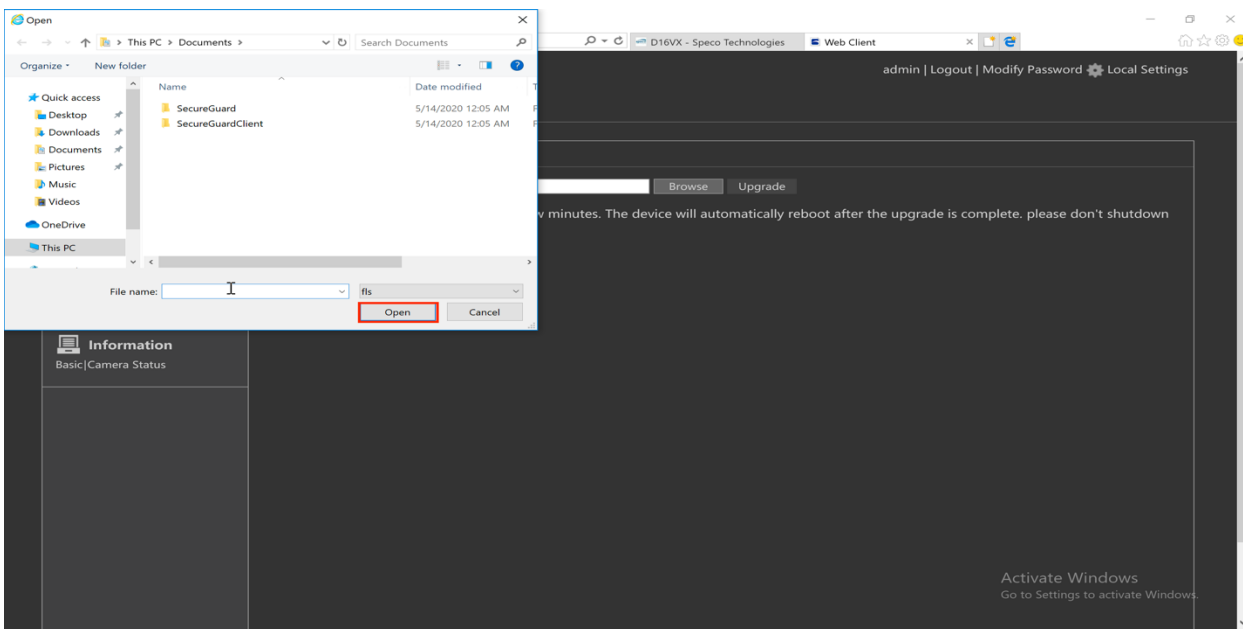

12) After opening the file, click **upgrade** as shown below. Your system will reboot when it is done upgrading.

